


## LX-30B

The most popular device from the EBS „LX-30“ family of communicators is a modern device enabling data transmission from the security control panel to 4G/2G mobile operator network monitoring software. Communicator is designed to make it possible to connect it to the security control panel using a telephone communicator, inputs or the bus (thanks to the SMART function COMMUNICATOR).

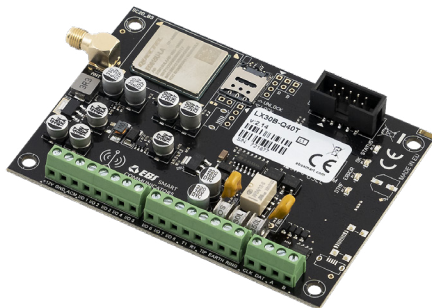

### HIGH LIFETIME

EBS communicators are renowned for its reliability and high durability



### SMART COMMUNICATOR

Can be connected via bus to selected EZS Paradox, DSC and Honeywell



### SUCCESSFUL MODEL COMMUNICATOR

Follows the famous predecessors LX20 and GC-30

### List of supported EZS for the SMART COMMUNICATOR function

**DSC:** PC1404, PC585, PC1565, PC5010, PC5020, PC1616, PC1832, PC1864

**HONEYWELL:** VISTA-15P, VISTA-20P, VISTA-21P, VISTA 48

**PARADOX MAGELLAN:** MG5000, MG5050/MG5050+, MG5050E

**PARADOX SPECTRA:** SP4000, SP5000/SP5500+, SP6000/SP6000+, SP7000/SP7000+, SP65

**PARADOX DIGIPLEX:** EVO48, EVOHD, EVO192 (firmware older than 7,50)

### Technical parameters

- 4G communication with the possibility of downloading to 2G
- Dimensions: 102mm x 73mm x 20mm
- 8 configurable connectors on inputs/outputs
- Memory for 5000 events
- Remote configuration: GPRS/LTE, SMS
- Local configuration: from PC via RS232 or bluetooth (MINI-PROG-BT)

Operating temperature range: -10 C ...+55 C	Power consumption: 70mA/300mA při 13,8 VDC	Encryption: AES
Humidity range: 5% ...93% without condensation	ARC protocols: SIA IP DC-09, EBS ContactID/XML	SIM Size: Nano SIM
Power range: 12-14 VDC, typically 13.8 VDC	Protocols at the telephone line input: ContactID, SIA	Certification: CE