


PX200NB

PX200NB is designed to transfer data from the security control panel to the monitoring software using 4G/2G mobile network. Communicator enables connection to the central security system via a telephone line (DTMF) or using inputs. PX200NB allows installation with independent power supply of the communicator.

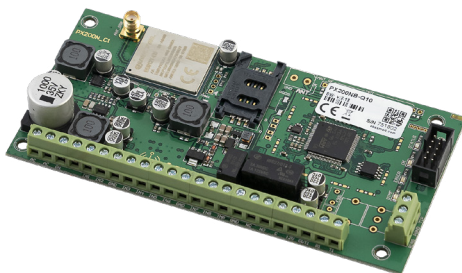

HIGH LIFETIME

EBS communicators are renowned for its reliability and high durability



INSTALLATION

Possibility of installation with independent power supply of Communicator



INPUTS

Use up to nine inputs and one relay output

Installation and setup

Communicator can be easily configured both remotely and locally. A popular variant includes local configuration using bluetooth communication using the MINI-PROG-BT programming key

Technical parameters

- 4G communication with the possibility of downloading to 2G
- Dimensions: 146mm x 73mm x 35mm
- 9 outputs, 1 OC outputs (max. load 100 mA) and one relay output
- Memory for 5000 events
- Remote configuration: GPRS, LTE_FDD, SMS
- Local configuration: from PC via RS232 or bluetooth (MINI-PROG-BT)

Operating temperature range: -10 C ...+55 C	Power consumption: 130mA/240mA at 18 VAC and a fully charged battery	Encryption: AES
Humidity range: 5% ...93% without condensation	ARC protocols: EBS ContactID/XML	SIM Size: Mini SIM
Power range: 16-20 VAC, typically 18 VAC	Protocols at the telephone line input: ContactID, SIA	Certification: CE